


Specialized In Office Light

48V MAGNETIC TRACK

—SERIES—

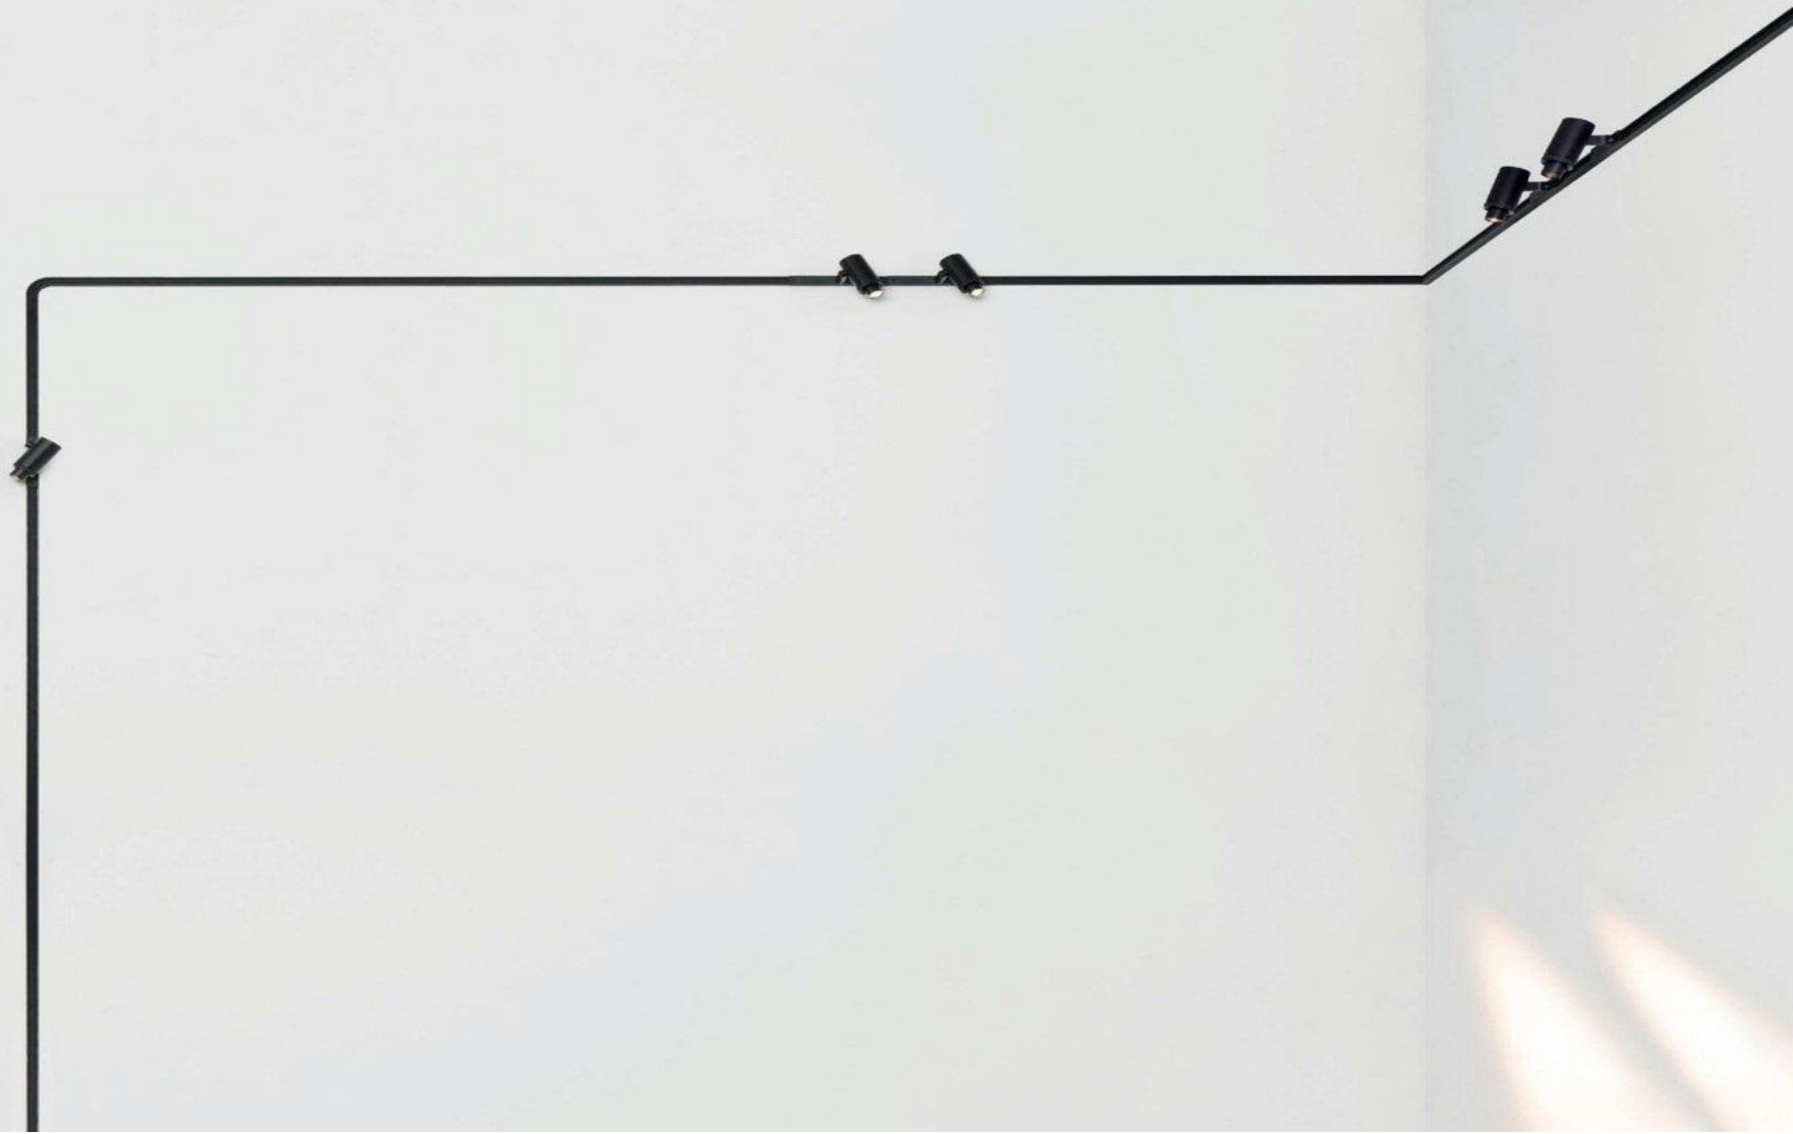

WIRE ON SIDE TYPE

IRON BAR(TRACK)

MAGNET(LAMP)

COPPER WIRE(TRACK)


INPUT MODULE

MAGNETIC TRACK

> 3M HEIGHT OF CEILING < 3M

M20

RECESSED



TRACK 48V SURFACE


Specialized In Office Light

M20

HOME USE

48V MAGNETIC TRACK

—SERIES—

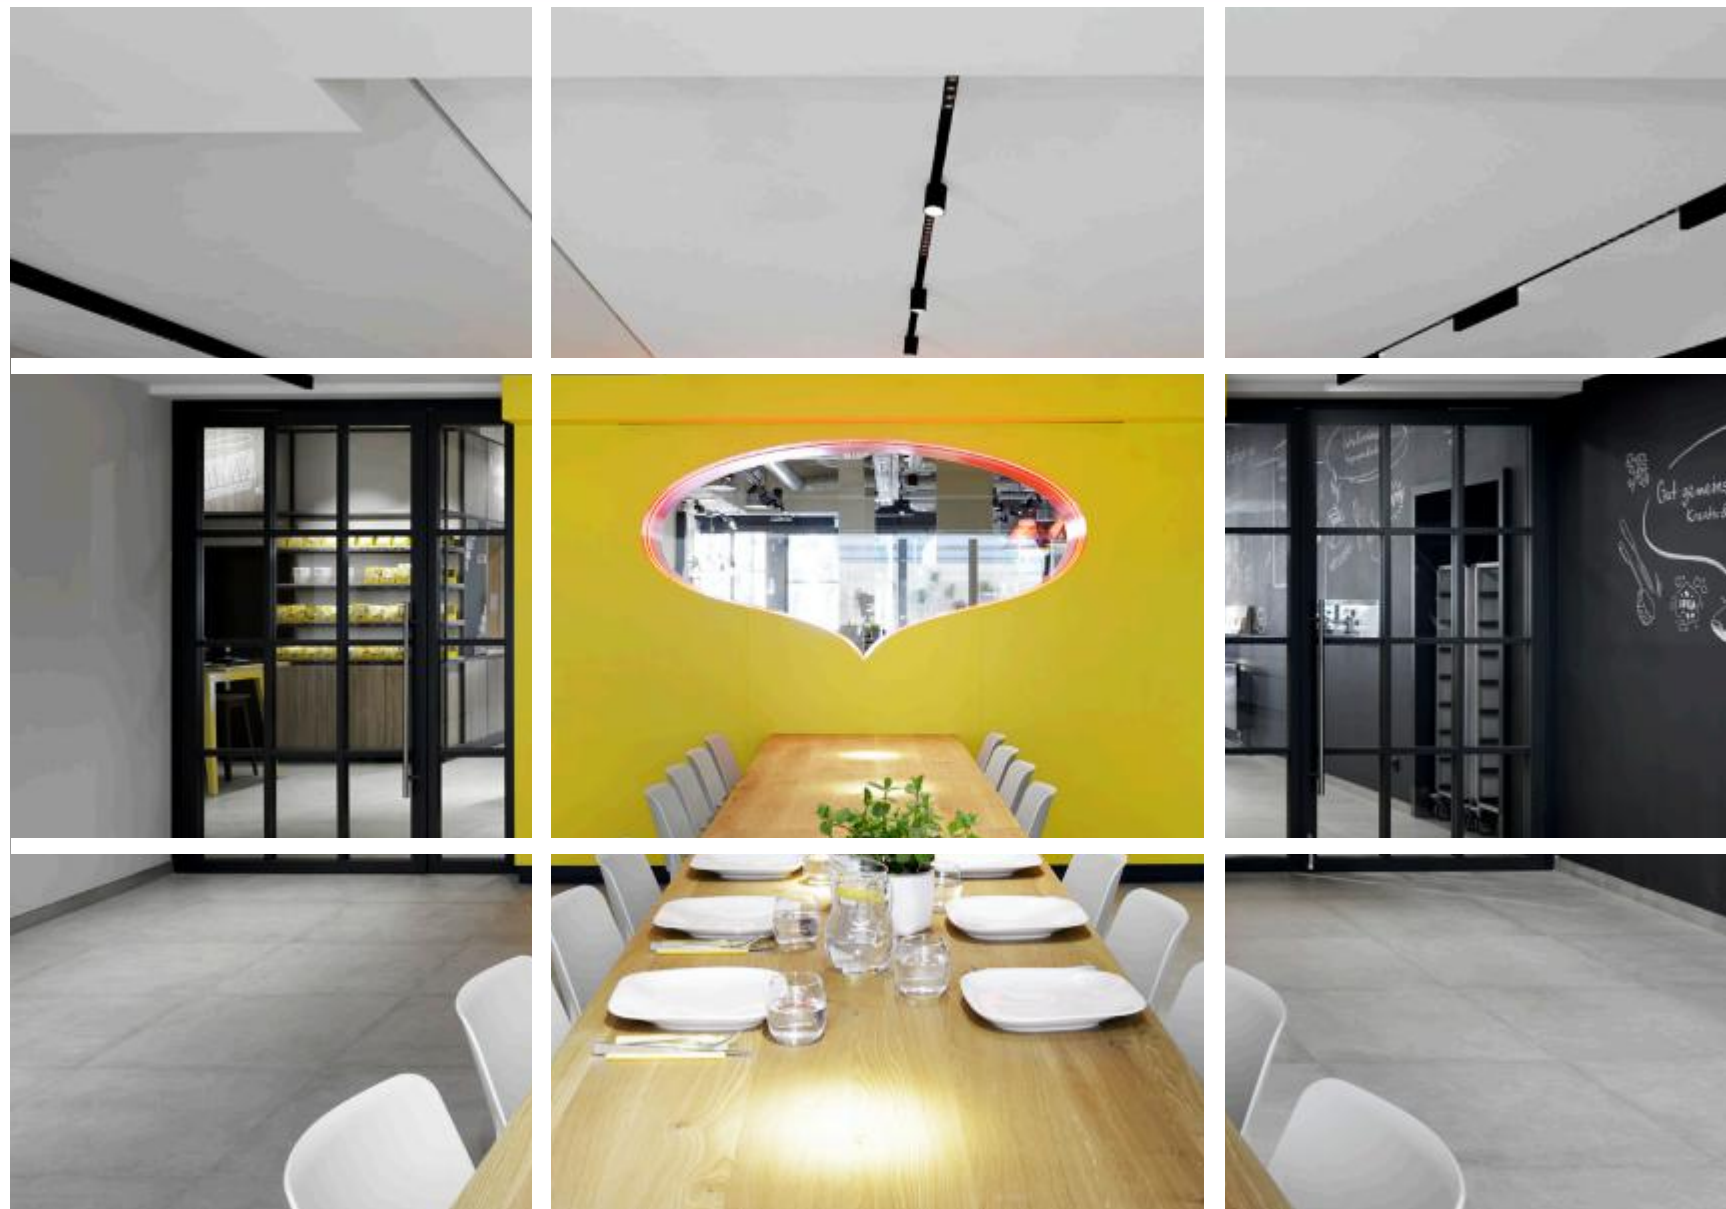







M20

DFS200 / DFS340 / DFS 680

- Beam Angle:105°
- LED Source: OSRAM 2835 SMD
- Power: 6w&12w&24w
- Dimensions: L200*W22*H25mm
L340*W22*H25mm
L680*W22*H25mm
- CCT: 3000K 4000K 5000K
- Ra >90
- Color Tolerance:3 SDMC
- Application: Basic light

- Material:Aluminum+PC
- Optics: Frosted PC
- Surface: Painting







M20

LB10 / LB20



- Beam Angle:30°
- LED Source: OSRAM 3030 SMD
- Power: 10w&20w
- Dimensions: L172*W22*H25mm
L341*W22*H25mm
- CCT: 3000K 4000K 5000K
- Ra >90
- Color Tolerance:3 SDMC
- UGR: <1
- Application: Accent light

- Material:Aluminum
- Optics: Reflector
- Surface: Painting







M20 FD6 / FD12



- Beam Angle:30°
- LED Source: OSRAM 3030 SMD
- Power: 6w&12w
- Dimensions: L118*W22*H86mm
L230*W22*H86mm
- CCT: 3000K 4000K 5000K
- Ra >90
- Color Tolerance:3 SDMC
- UGR: <16
- Application: Accent light,360° Rotated

- Material:Aluminum
- Optics: Lens
- Surface: Painting



M20

TL7 / TL12



- Beam Angle:24°
- LED Source: LUMINUS COB
- Power: 7w&12w
- Dimensions: $\Phi 36 \times L150 \times H105\text{mm}$
 $\Phi 48 \times L150 \times H125\text{mm}$
- CCT: 3000K 4000K 5000K
- Ra >90
- Color Tolerance:3 SDMC
- UGR: <16
- Application: Accent light,360° Rotated

- Material:Aluminum
- Optics: Lens
- Surface: Painting

