

Traditional Tri-proof Fixtures

IK08

ANTI-IMPACT

IP65




CORROSION PROOF



IP68 cable gland



Product Details

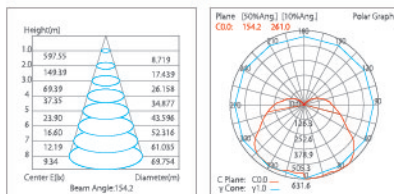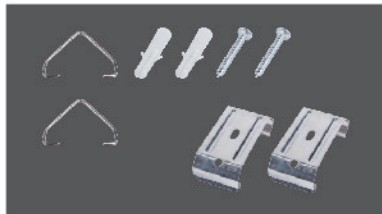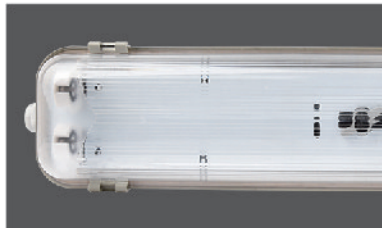

3000 K 4000 K 6500 K

220-240V
≥80
>0.9
30 000
-20°+40°
120°
ECO

Item No.	Wattage [W]	Base	Material	Size [LxWxHmm]	Packing [Pcs / M³ / KG]
FF302-118	9	G13	ABS/PC+PC/PS	660x78x69	15 / 0.056 / 8
FF302-218	18	G13	ABS/PC+PC/PS	660x78x99	10 / 0.058 / 8.5
FF302-136	18	G13	ABS/PC+PC/PS	1260x78x69	12 / 0.082 / 10
FF302-236	36	G13	ABS/PC+PC/PS	1260x78x99	8 / 0.09 / 11.5
FF302-158	24	G13	ABS/PC+PC/PS	1560x78x69	12 / 0.1 / 13
FF302-258	48	G13	ABS/PC+PC/PS	1560x78x99	8 / 0.11 / 13.5